




With Photocell

DIMENSIONS:

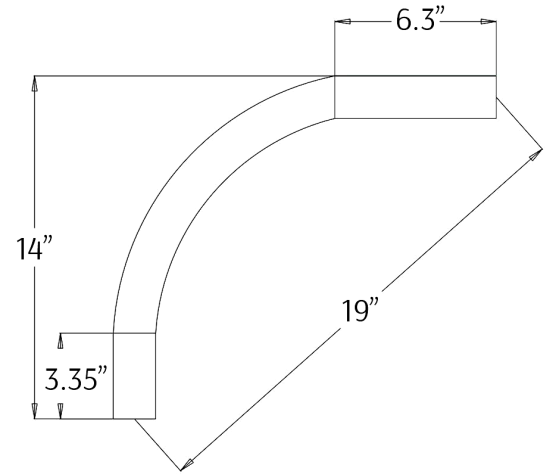

LR-ECO-20W-50K-P
LR-ECO-20W-30K-P

LED BARN LIGHTS WITH PHOTOCELL

Ideal for general site lighting, doorway, pathway, alleys, parking areas, loading docks.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC
- Wattage: 20W
- Efficacy: 120LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Optional 90° Arm
- Driver located in isolated compartment for improved thermal management
- UL listed photocell
- Lifespan: 50,000 hr.
- IP Rating: IP65

CERTIFICATIONS:UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LR-ECO-20W-50K-P	20W	120~277VAC	2400LM	5000K
LR-ECO-20W-30K-P	20W	120~277VAC	2400LM	3000K



LR-ECO-ARM

MODEL	DESCRIPTION
LR-ECO-ARM	Optional 90° Arm for LR-ECO series

LIGHTING SPECIFICATIONS:

- Lens: Polycarbonate lens
- Total lumens: 2400LM
- Color temperature: 5000K/3000k
- Color rendering index: >80
- Beam Angel: 90°

WARRANTY: 7 years

